


Intelligent Satellite Routers

The UHP-131 / UHP-231 routers with additional processing power allow to reduce the bandwidth consumption and improve the user experience with help of intelligent optimization and acceleration value-added software. Routers comprise multichannel DVB and MF TDMA demodulators, a universal SCPC/ TDMA modulator, a powerful IP router and a multipurpose embedded computer with powerful Comtech WAN Optimization (WANOp) software.

Comtech's WANOp provides a Transparent Layer 2 solution, compatible with any protocol mix, supporting L2/L3 VPNs with overlapping IP addressing space, and uses a combination of techniques to deliver both lightning-fast file transfer AND a true broadband web browsing, video streaming, Internet access user experience. Key WANOp features:

- TCP PEP [Performance Enhancement Proxy]
- TCP over Layer 3 IP acceleration, including GTP, GRE and mGRE
- L2/L3 VPNs and MNOs concurrent overlapping IP addressing space
- DNS Caching (including GTP and GRE encapsulated tunneled traffic)
- Full Layer-2 (L2) LAN-WAN transparency (transparent bridging)
- Optional traffic optimization and compression
- Jumbo Ethernet Frame support
- Optional Spread Spectrum TDMA return carrier
- Support TCP acceleration software Bypass
- Management and Operation

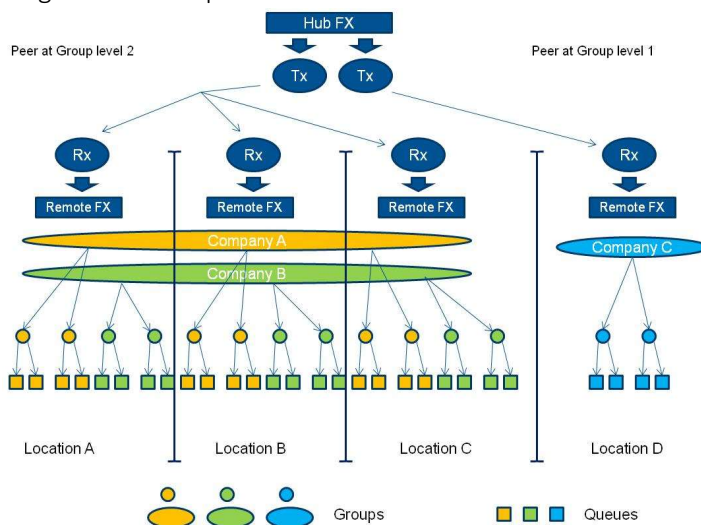

UHP-131 / UHP-231 routers are supplied in a compact 1U chassis for installation in a standard 19-inch rack. Built-in AC power supply with high power rating and 10 MHz frequency reference ensure reliable operation of the router itself and of the outdoor RF equipment from multiple vendors. Low power consumption, optional -48 VDC power input, and uniquely fast start on power up facilitate use of alternative power sources, such as solar batteries.

Key Features:

- Two independent DVB demodulators with separate software-switchable IF inputs and rate up to 500 Msps
- Embedded computer for advanced data processing, including backhaul optimization and traffic acceleration
- Optional 2G/3G/LTE backhaul optimization, GTP decoding, TCP acceleration and payload compression
- Efficient DVB-S2/S2X ACM modulations with 5% or 20% roll-off and support for wideband HTS transponders
- Multichannel MF-TDMA demodulator with innovative protocol and proven efficiency of 96% vs. SCPC
- Adaptive coding and modulation (ACM) in forward and return channels, including SCPC and TDMA modes
- Ultra-low latency VSAT system with round-trip delay about 570 ms for TDMA mode of operation
- Various modes of operation and topologies: SCPC, TDM/ TDMA, TDM/TDMA Mesh, Hubless TDMA
- Ability to insert third party encryption to allow transmission over satellite of WAN optimized, encrypted traffic
- Superior IP router productivity up to 190 000 PPS and rich set of supported protocols, multi-level QoS
- Dual-stack IPv6/IPv4 routing architecture and Layer 2 bridging mode
- 1:1 automatic redundancy without external controllers or M:N Smart Redundancy

TECHNICAL SPECIFICATIONS: UHP-131 INTELLIGENT SATELLITE ROUTER

NETWORK	
Topology	Star, Dual-Gateway
Modes of operation	TDM/TDMA Star terminal, TDM/TDMA Rx-only, SCPC Demodulator, Spectrum Analyzer
TDM (SCPC) CHANNEL - DEMODULATOR	
Standard	DVB-S2 / DVB-S2X with Adaptive Coding and Modulation
Channels	Two demodulators with selectable IF inputs Rx1 and Rx2
Modulation	QPSK, 8PSK, 16APSK, 32APSK, 64APSK, 128APSK, 256APSK
FEC	All DVB-S2 & DVB-S2X MODCODs
Symbol Rate	300 ksps - 500 Msps
Data Rate	150 kbps - 225 Mbps
QoS	8-level prioritization, traffic policies, CIR, MIR, group QoS, hierarchic traffic shaper, FAP
TDMA CHANNEL - MODULATOR	
Standard	LDPC TDMA with Adaptive Coding and Modulation
Channels	One MF-TDMA modulator
Modulation	BPSK, QPSK, 8PSK, 16APSK; Roll-off: 5%, 20%
FEC	1/2, 2/3, 3/4, 5/6
Symbol Rate	100 ksps - 11 Msps; step 1 ksps
Data Rate	100 kbps - 35 Mbps
TDMA Protocol	Frame 50 -1000 ms, 14 slot sizes, manageable minimal bandwidth; fast MF-TDMA hopping Spectrum spreading with factors 2 and 4, maximum chip rate 11.7 Mcps
QoS	8-level prioritization, traffic policies, CIR, MIR, group QoS, hierarchic traffic shaper, FAP
ROUTER	
Performance	Up to 150 000 packets per second
Support	DSCP, multiple IP/VLANs, PAT, proxy ARP, L2 Bridging, TCP Acceleration, Jumbo frames, AES-256, X.509
Protocols	IPv4/IPv6, IGMP, cRTP, SNMP, RIP, SNTp, TFTP, PPP, DHCP, DHCP Relay, OpenAMIP
Management	HTTP interface, SNMP, Telnet, NMS with VNO support
INTERFACES	
User LAN	2 x Fast Ethernet 10/100 Base-T
Maintenance console	miniUSB, B female
IF Rx (both inputs)	950-2150 MHz; Ref. 10 MHz/+5 dBm [RX2]; 13.5/18 VDC 0.75A; F type
IF Tx	950-2150 MHz, -1...-46 dBm; Ref. 10 MHz/+5 dBm; 24V/3A; F type
EMBEDDED COMPUTER	
Performance	Intel Celeron J1900 Quad Core Four Thread 2.0 GHz; Intel HD Graphics; DDR3L
Interfaces	2 x Gigabit 10/100/1000 Base-T; USB 2.0; VGA
MECHANICAL / ENVIRONMENTAL	
Power	90-264 VAC; 24 VDC or 48 VDC options; 48 W
Temperature/Humidity	0...+50 °C / Relative humidity 95 ± 5% (Temperature condition: 0°C ~ +50°C)
Size / Weigh	440x44x170 mm / 2.3 kg



TECHNICAL SPECIFICATIONS: UHP-231 INTELLIGENT SATELLITE ROUTER

NETWORK		
Topology	Point-to-Point, Star, Mesh, Dual-Gateway, Hubless	
Modes of operation	SCPC, SCPC DAMA, TDM/SCPC, TDM/TDMA Star/Mesh, Hubless TDMA, Spectrum Analyzer	
TDM (SCPC) CHANNEL	MODULATOR	DEMODULATOR
Standard	DVB-S2 / DVB-S2X with Adaptive Coding and Modulation	
Channels	One universal SCPC/TDMA modulator	Two demodulators with selectable IF inputs
Modulation	QPSK, 8PSK, 16APSK, 32APSK, 64APSK, 128APSK, 256APSK; Roll-off: 5% or 20%	
FEC	Most of DVB-S2 & DVB-S2X MODCODs	All DVB-S2 & DVB-S2X MODCODs
Symbol Rate	300 ksp/s - 64 Msp/s; step 1 ksp/s (51 Msp/s @32APSK, 43 Msp/s @64APSK)	300 ksp/s - 500 Msp/s
Data Rate	150 kbps - 225 Mbps	
QoS	8-level prioritization, traffic policies, CIR, MIR, group QoS, hierarchic traffic shaper, FAP	
TDMA CHANNEL	MODULATOR	DEMODULATOR
Standard	LDPC TDMA with Adaptive Coding and Modulation	
Channels	One universal SCPC/TDMA modulator	Eight-channel MF-TDMA demodulator
Modulation	BPSK, QPSK, 8PSK, 16APSK; Roll-off: 5%, 20%	
FEC	1/2, 2/3, 3/4, 5/6	
Symbol Rate	100 ksp/s - 11 Msp/s; step 1 ksp/s	100 ksp/s - 22 Msp/s; step 1 ksp/s
Data Rate	100 kbps - 35 Mbps	100 kbps - 70 Mbps
TDMA Protocol	Frame 50 -1000 ms, 14 slot sizes, manageable minimal bandwidth; fast MF-TDMA hopping Spectrum spreading with factors 2 and 4, maximum chip rate 11.7 Mcps	
QoS	8-level prioritization, traffic policies, CIR, MIR, group QoS, hierarchic traffic shaper, FAP	
ROUTER		
Performance	Up to 190 000 packets per second	
Support	DSCP, multiple IP/VLANs, PAT, proxy ARP, L2 Bridging, TCP Acceleration, Jumbo frames, AES-256, X.509	
Protocols	IPv4/IPv6, IGMP, cRTP, SNMP, RIP, SNTp, TFTP, PPP, DHCP, DHCP Relay, OpenAMIP	
Management	HTTP interface, SNMP, Telnet, NMS with VNO support	
INTERFACES		
User LAN	2 x Gigabit 10/100/1000 Base-T	
Maintenance console	miniUSB, B female	
IF Rx (both inputs)	950-2150 MHz; Ref. 10 MHz/+5 dBm [RX1]; 13.5/18 VDC 0.75A; F type	
IF Tx	950-2150 MHz, -1...-46 dBm; Ref. 10 MHz/+5 dBm; 24V/3A; F type	
EMBEDDED COMPUTER		
Performance	Intel Celeron J1900 Quad Core Four Thread 2.0 GHz; Intel HD Graphics; DDR3L	
Interfaces	2 x Gigabit 10/100/1000 Base-T; USB 2.0; VGA	
MECHANICAL / ENVIRONMENTAL		
Power	90-264 VAC; 24 VDC or 48 VDC options; 48 W	
Temperature/Humidity	0...+50 °C / Relative humidity 95 ± 5% (Temperature condition: 0°C ~ +50°C)	
Size / Weigh	440x44x170 mm / 2.3 kg	



REV-3.7-OCT21 | SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE