


CS41000

Troposcatter C-Band Indoor/Outdoor Amplifier

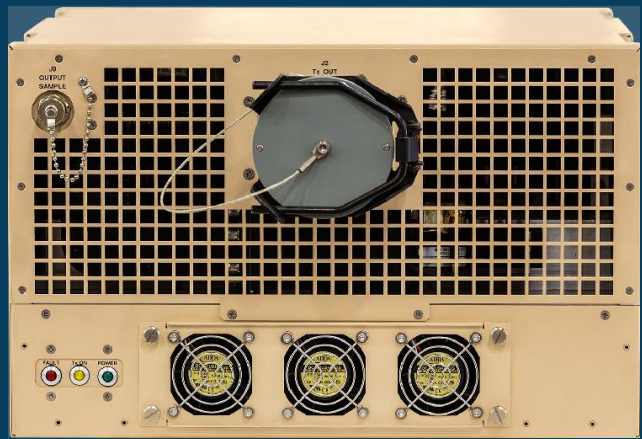

Comtech's 1 kW **CS41000** Solid State Power Amplifier (SSPA), operating from 4.4 GHz to 5.0 GHz, is a compact, thermally efficient indoor/outdoor design. The units' performance is a result of extensive experience in the design of indoor/outdoor amplifiers and transceivers. The **CS41000** is constructed with highly reliable gallium arsenide field-effect transistors. The GaN technology in the SSPA allows linear operation much closer to rated output power compared to other power amplifiers and lower prime power requirements than GaAs FET amplifiers. In addition, SSPAs have better lifetime (MTBF) and can replace TWTs with twice the output saturated power output levels of the **CS41000**.

The **CS41000** comes with enhanced built in features which other manufacturers offer as options, including temperature compensation, output sample port, forward and reverse power monitors, power factor corrected supply and full remote monitor & control (M&C) capabilities (including serial and Ethernet).

Greatly enhancing system maintainability, the **CS41000** includes built-in data logging capability. By recording critical operational parameters (such as temperature, output power, mute status, etc.) at time stamped intervals, the user can quickly gather intelligence about not only the unit itself, but also its operational environment.

The **CS41000** is an integral component in the Comtech family of complete troposcatter terminals such as the TCT3000A-V1 and V2 (Tactical Communications Terminals) and the MTTTS (Modular Transportable Troposcatter System).



TechnicalSpecifications

Performance	
Frequency Range	4.4 - 5.0 GHz
Instantaneous 3dB Bandwidth	600 MHz minimum
Amplifier Type	Class A or AB, Continuous Wave
Noise Figure (with RF Input Attenuator set for minimum attenuation)	18 dB maximum
Rated Output Power	60 dBm minimum
Small Signal Gain (small signal with RF Input Attenuator set for minimum attenuation)	+40 dB minimum
Gain Adjustment Range	10 dB min
Input Power Without Damage	+30 dBm, minimum
Gain Variation at rated power over 620 MHz	±1.6 dB maximum
Gain Variation at any output power over any 40 MHz bandwidth	±0.5 dB maximum
Gain Slope	±0.02 dB/MHz maximum
Gain Stability (constant drive and temperature) over 24 hours, -40°C to +60°C	±0.25 dB maximum/24 hours @ P Rated (at +25°C) and ±0.75 dB over the temperature range
Input VSWR (with RF Input Attenuator set for minimum attenuation)	1.25:1 maximum (19.1 dB return loss)
Load VSWR (maximum allowable)	1.5:1 for specification compliance 2:1 with no damage (continuous)
AM to PM conversion	3.5°/dB at P Rated – 1dB
Harmonic Output	2nd <-77 dBc or (<-20 dBm) 3rd <-77 dBc or (<-20 dBm) 4th and greater to 40 GHz: <-80 dBc
Phase Noise	(IESS 308/309) -10dB
Noise & Spurious	-70 dBc The sum of the fundamental and each harmonic component of the alternating (AC) line frequency shall not exceed -45 dBc
Intermodulation Products - each carrier set 6 dB below rated power	-17 dBc 3rd order IM products measured relative to either desired carrier at the RF output
Spectral re-growth @ QPSK +/- 1 to 1.5 Symbol Rate offset	-25 dBc minimum at any power up to 1 dB below rated output power
RF Inhibit Response Time	500µsec

AC Power	
AC Voltage	180-264 VAC
Frequency	47 to 63 Hz
Power Consumption	2250 VA maximum @ 500 W output

Specifications are subject to change

Environmental & Physical	
Operating temperature	-40°F to 140°F (-40°C to 60°C)
Storage Temperature	-58°F to 185°F (-50°C to 85°C)
Humidity	0 to 100%, Condensing
Altitude Operating	10,000 ft (3,000 m) with standard adiabatic de-rating
Altitude Storage	45,932 ft (14,000 m)
Height	12.5 in. (31.75 cm)
Width	17.625 in. (44.77 cm)
Depth	23.5 in. (59.7 cm)
Weight	110 lb (63.5 kg)
Input Connector	Type-N, Female, 50 ohms
Output Connector	Waveguide: Type CPR-187G, all threaded stainless steel inserts
50 dB RF Output Power Monitor Connector	Type-N, Female, 50 ohms
Monitor and Control Connector	19 pin MS
AC Power Connector	3 Pin MS

Residual AM	
(In dB below rated single carrier output as measured in 4 kHz band)	
f ₀ to 4 kHz	-35 dBc minimum
4 kHz to 500 kHz	-20 (1.15 + log f), where f is in kHz
Above 500 kHz	-77 dBc maximum
Group Delay (in any 40 MHz Band)	
Linear	0.04 nanoseconds/MHz
Parabolic	0.005 nanoseconds/MHz ²
Ripple	1.0 nanoseconds peak to peak maximum



CS41000 in a transit case configuration

About Us

Comtech Telecommunications Corp. is a leading global technology company providing terrestrial and wireless network solutions, next-generation 9-1-1 emergency services, satellite and space communications technologies, and cloud native solutions to commercial and government customers around the world. Our unique culture of innovation and employee empowerment unleashes a relentless passion for customer success. With multiple facilities located in technology corridors throughout the United States and the world, Comtech leverages its global presence, technology leadership and decades of experience to create the world's most innovative communications solutions.

212 Outlook Point Dr STE 100
Orlando, FL 32809
Phone: 407.854.1950
csi-sales@comtech.com
comtech.com

Approved for Public Release:
111925